





Product range for Nordic Wood LINEAR T

MOUNTING T-PROFILE

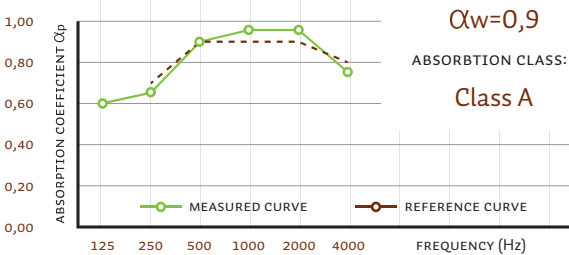

SLAT SIZES							
	18x28	20x40	20x68	28x28	45x45	Special size on request	
PANEL DIMENSIONS							
	600x600		600x1200		600x1800	Special size	
VISIBLE EDGE TYPE	EDGE E 		EDGE C 		WOOD QUALITY	PREMIUM 	
						ECO 	
						* Spruce only eco	
WOOD SPECIES	BIRCH 	SPRUCE 	PINE 	LARCH 	OAK 	THERMO 	
						NEW	
FINISHING	VARNISH 		STAIN 		WAX COLOR 		
					OIL 		
					NATURAL 		
ACOUSTIK FLEECE	WHITE 	GREY 	BLACK 				
			• Acoustic properties • High puncture and tear resistance • Moisture resistance and non-fraying • Fire resistance- classified B-s₁,d₀				
SOUND ABSORPTION VALUES	 $\alpha_w=0,9$ ABSORPTION CLASS: * Class A MEASURED CURVE REFERENCE CURVE 125 250 500 1000 2000 4000 FREQUENCY (Hz)					REACTION TO FIRE **	ACCORDING TO EN 13501-1 B-s ₁ ,d ₀
* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm. ** Depending on the type of wood							

PRODUCT RANGE

- 1. LINEAR T 28/14**
- 2. LINEAR T 28/18**
- 3. LINEAR T 40/8**
- 4. LINEAR T 40/10**
- 5. LINEAR T 40/11**
- 6. LINEAR T 40/13**
- 7. LINEAR T 68/5**
- 8. LINEAR T 68/6**
- 9. LINEAR T 68/7**
- 10. LINEAR TSQ 28/10**
- 11. LINEAR T 45/5**
- 12. SPECIAL ON REQUEST**