

Product range for Nordic Wood PANEL

T-PROFILE, SCREW MOUNTING



SLAT SIZES



20x40



20x90



Special size
on request

PANEL
DIMENSIONS

600x600

600x1200

600x1800




Special
size

VISIBLE
EDGE TYPE

EDGE E

EDGE C

EDGE B



WOOD QUALITY

PREMIUM

ECO



* Spruce only eco

WOOD SPECIES

BIRCH


SPRUCE

PINE

LARCH

OAK

THERMO



NEW

FINISHING

VARNISH

STAIN

WAX
COLOR

OIL

NATURAL

ACOUSTIK FLEECE

WHITE


GREY

BLACK



- Acoustic properties
- High puncture and tear resistance
- Moisture resistance and non-fraying
- Fire resistance- classified B-s1,d0

SOUND ABSORPTION VALUES

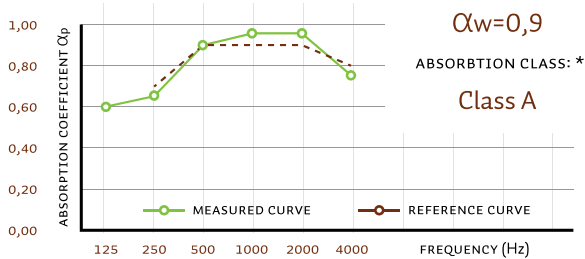

REACTION TO FIRE **

ACCORDING TO

EN 13501-1

B-s₁,d₀

* Acoustic absorption as per ISO 354 standard, various data calculated according to ISO. Nordic Wood Linear + addition MW 20 mm.
** Depending on the type of wood

PRODUCT RANGE

- PANEL 20/7**
600mm length, 20mm height, 7mm spacing. Spacing: 40, 45,7, 15.
- PANEL 20/9**
600mm length, 20mm height, 9mm spacing. Spacing: 40, 26,7, 15.
- PANEL 90/5**
600mm length, 20mm height, 5mm spacing. Spacing: 90, 30, 15.
- PANEL 90/6**
600mm length, 20mm height, 6mm spacing. Spacing: 90, 10, 15.
- SPECIAL ON REQUEST**